


## AUTOMOTIVE RELAY




AS403(RL15)




AS404(JD1929)



AS403 1Z 1H



AS404 1Z 1H



### Contact specification AS403

Contact form	1H, 1Z
Contact resistance	$\leq 50\text{m}\Omega$ ( 1A 6VDC )
Contact material	AgCdO AgSnO <sub>2</sub>
Contact capacity	30A 12VDC

### Technical specification

Insulation resistance	$\geq 50\text{M}\Omega$ ( 500VDC )
Dielectric strength	Between coil and contact $\geq 500\text{VAC}$ 1min Between open contacts $\geq 500\text{VAC}$ 1min
Operate / Release time	$\leq 15\text{ms}/10\text{ms}$
Terminal type	Quick terminal mounting

### Coil specification


Rated coil power	1.8W
------------------	------

### Coil data


Nominal voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$
5	3.5	0.5	16
6	4.2	0.6	20
12	8.4	1.2	85
24	16.8	2.4	320

### Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

AS403 Outline dimension

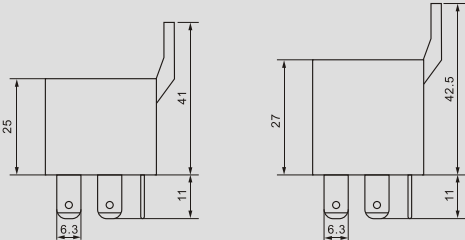

AS403 Mounting holes (Bottom view)



AS403 Wiring diagram (Bottom view)

