


RUUH/RUDH

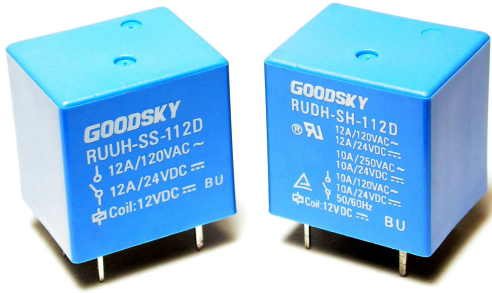

Main Feature

1. High switching current up to 15A in small size.
2. UL, CUL & TÜV safety standard approval.
3. Class F insulation system.
4. Highly adapt to harsh condition with high temperature and vibration.
5. Halogen Free series available.

Contact Rating

Load Type	RUDH (DM/DB)	RUDH (D)	RUUH (DM/DB)	RUUH (D)
Rated Load (Resistive)	12A 120 VAC	12A 120 VAC	15A 120VAC	15A 120VAC
	12A 24 VDC	12A 24 VDC	15A 30VDC	15A 30VDC
	10A 250 VAC	10A 250 VAC	-	-
Rated Carrying Current	12A	12A	15A	15A
Max. Allowable Voltage	AC 250V	AC 250V	AC 250V	AC 250V
	DC 110V	DC 110V	DC 110V	DC 110V
Max. Allowable Current	12A	12A	15A	15A
Max. Allowable Power Force	2500VA	2500VA	1800VA	1800VA
	288W	288W	360W	360W
Contact Material	Ag Alloy	Ag Alloy	Ag Alloy	Ag Alloy
Contact Form	SPST	SPDT	SPST	SPDT

Application

Domestic Appliances, Office Machines, Audio Equipment, Coffeepot, Control Units, etc.

Performance (at Initial Value)

- Contact Resistance 100mΩMax. @1A,6VDC
- Operate Time..... 15mSec. Max.
- Release Time 5 mSec. Max.
- Dielectric Strength:
 - Between Coil & Contact 1,500VAC at 50/60 Hz for one minute.
 - Between Contacts 750VAC at 50/60 Hz for one minute.
 - 2,000VAC (Special spec)
- Surge Strength 3,000V (between Coil & Contact 1.2x50μSec.)
- Insulation Resistance 100 MegaΩ Min. at 500VDC.
- Max. On/Off Switching:
 - Electrical..... 6 Cycles per Minute.
 - Mechanical 300 Cycles per Minute.
- Temperature Range..... -30~70°C
- Humidity Range..... 45~85% RH.
- Coil Temperature Rise..... 35°C Max.

- Vibration:
 - Endurance.....10 to 55 Hz dual amplitude width 1.5mm.
 - Error Operation 10 to 55 Hz dual amplitude width 1.5mm.
- Shock:
 - Endurance1,000 m/S².
 - Error Operation 100 m/S².
- Life Expectancy:
 - Mechanical10⁷ Operations at No Load condition.
 - Electrical 10⁵ Operations at Rated Resistive Load.
- Weight.....About 12.2 g.

Safety Standard & File Number

- RUDH:
 - UL & C-UL.....E141060
 - TÜV.....R09352326
- RUUH:
 - NIL

RUUH/RUDH

Coil Specification (at 20°C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 10\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
RUUH RUDH	3	150	20	Abt. 0.45	75% Maximum	5% Minimum	130%
	6	75	80				
	9	50	180				
	12	37.5	320				
	24	18.7	1,280	Abt. 0.51	80% Max.		
48	13.7	4,500					

Ordering Information

RU DH - SS - 1 12 D M F

Insulation System:

Contact Form:

Coil Type:

Coil Voltage:

Number of Pole:

Type of Sealing:

Type:

Nil: Standard Class

F: F Class (for RUDH only)

Nil: One Form C

M: One Form A

B: One Form B

D: Standard DC Coil

03: 3V, 06: 6V, 09: 9V, 12: 12V, 24: 24V, 48: 48V

1: One Pole

SS: RT II Flux Proofed Relays

SH: RT III Wash Tight Relays




RUDH

RUUH


Classification

Model	RU DH / RUUH		
	1C	1A	1B
Contact Form			
Flux Proofed Relay	RU DH / RUUH -SS-1□□D	RU DH / RUUH - SS-1□□DM	RU DH / RUUH -SS-1□□DB
Wash Tight Relay	RU DH / RUUH-SH-1□□D	RU DH / RUUH - SH-1□□DM	RU DH / RUUH -SH-1□□DB

Dimension ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

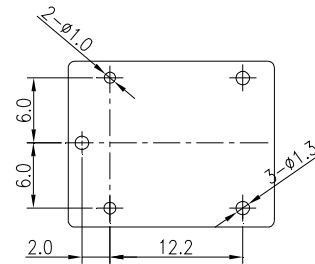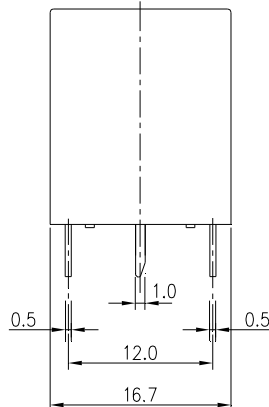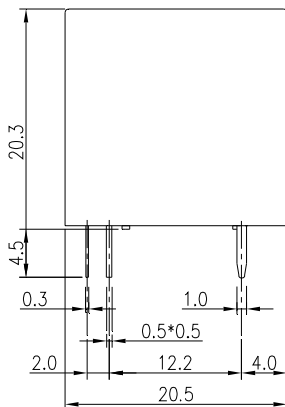

P.C.B. Layout



Bottom View