

HJQ-13F-1C

- 16A transfer contacts
- Different dust-proof cover,different layout
- Conform to RoHS,ELV directive

28×21.5×35



03001006459

US E173485

R50031316

ORDERING CODE

<u>HJQ-13F</u> — <u>1Z</u> — <u>F</u> (<u>P</u>) / <u>12VDC</u>				
1	2	3	4	5
1. Relay Model	5. Coil Nominal Voltage			
2.	5,6,12,24,48,110,120VDC			
1Z: Form 1C	6,12,24,48,110,220/240VAC			
3. With Flange for 38mm pitch hole				
4. P: PCB Type				
Nil: B Type				

COIL DATA at 20°C

Nominal Voltage (VDC)	5	6	12	24	48	110/120	220/240	0.9W
Coil Resistance (Ω)	28	40	160	640	2560	11000		
Rated Current (mA)	178.5	150	75	37.5	18.75	10		
Max Operate Voltage (VDC)	3.75	4.5	9	18	36	82.5		
Min Release Voltage (VDC)	0.5	0.6	1.2	2.4	4.8	11		
Nominal Voltage (VAC)		6	12	24	48	110/120	220/240	1.2VA
Coil Resistance (Ω)		11.5	46	180	735	4550	14400	
Max Operate Voltage (VAC)		4.8	9.6	19.2	38.4	96	176	
Min Release Voltage (VAC)		1.2	2.4	4.8	9.6	22	44	
Max Applicable Voltage	70	130%, 23			170%			
	5-24VDC/6-48VAC	10%, 48-110VDC/110-240VAC			15%。			

CONTACT DATA

Contact Form	1Z
Contact Material	Silver Alloy
Load	Resistive load(COS Φ=1)
Contact Ratings	16A 250VAC/30VDC
Minimum load	100mA 5VDC
Max Switching Voltage	250VAC/30VDC
Max Switching Current	20A
Max Switching Power	4000VA/480W
Contact Resistance	100mΩ Max at 6VDC 1A
Life Expectancy	Electrical : 100,000 Operations(at30Operations/minute)
	Mechanical : 10,000,000 Operations(at300Operations/minute)




■ CHARACTERISTICS DATA

Insulation Resistance	100M Ω Min at 500VDC
Dielectric Strength Between Open Contacts	1000VAC(for one minute)
Between Contacts and coil	1500VAC(for one minute)
Operate Time	25ms
Release Time	25ms
Temperature Range	-40°C to +70°C
Shock Resistance	Operating Extremes : 20G
	Damage Limits : 100G
Vibration Resistance	10-55Hz, 1.5mm
Max. switching frequency	Mechanical: 18,000operations/hr
	Electrical: 1,800operations/hr
Humidity	40-85%
Weight	Approx 35g
Safety Standard	UL cUL TÜV CQC

■ APPROVED STANDARDS

Model	Coiling rating	Safety Standard	Contact rating
HJQ-13F-1C	5 to 110VDC	TÜV	16A 240VAC
	6 to 240VAC		16A 30VDC
	5 to 110VDC	UL/cUL	16A 250VAC
	6 to 240VAC		16A 30VDC
	5 to 110VDC	CQC	16A 240VAC
	6 to 240VAC		

■ ENGINEERING DATA

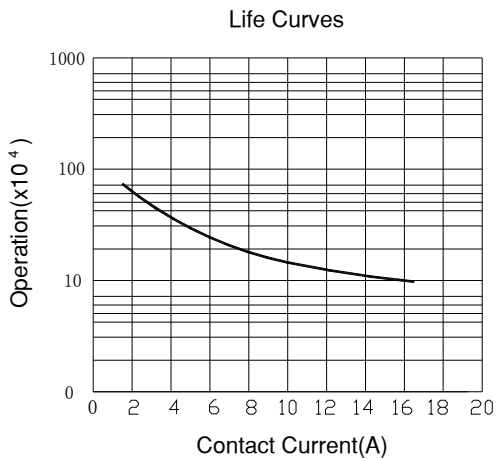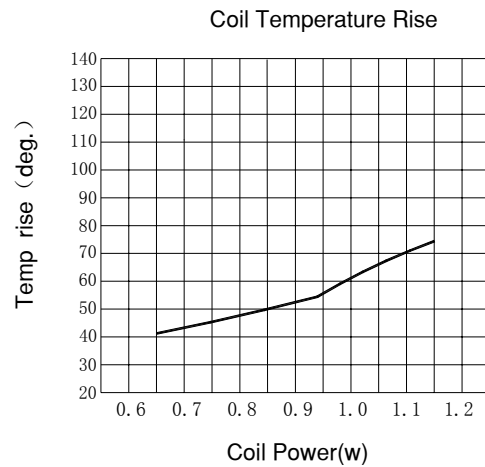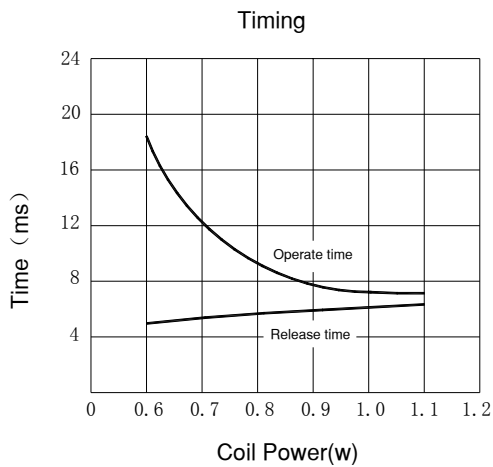

OVERALL AND MOUNTING DIMENSIONS

