






**CHARACTERISTICS DATA**

Insulation Resistance	100MΩ Min at 500VDC
Dielectric Strength Between Open Contacts	1000VAC(for one minute)
Between Contacts and coil	1500VAC(for one minute)
Operate Time	25ms
Release Time	25ms
Temperature Range	-40°C to +70°C
Shock Resistance	Operating Extremes : 20G
	Damage Limits : 100G
Vibration Resistance	10-55Hz, 1.5mm
Max. switching frequency	Mechanical: 18,000operations/hr
	Electrical: 1,800operations/hr
Humidity	40-85%
Weight	Approx 35g
Safety Standard	UL cUL TÜV CQC

**APPROVED STANDARDS**

Model	Coiling rating	Safety Standard	Contact rating
HJQ-13F-2C	5 to 110VDC	TÜV	10A 240VAC
	6 to 240VAC		10A 30VDC
	5 to 110VDC	UL/cUL	10A 250VAC
	6 to 240VAC		10A 30VDC 15A 125VAC
	5 to 110VDC	CQC	10A 240VAC
	6 to 240VAC		

**ENGINEERING DATA**

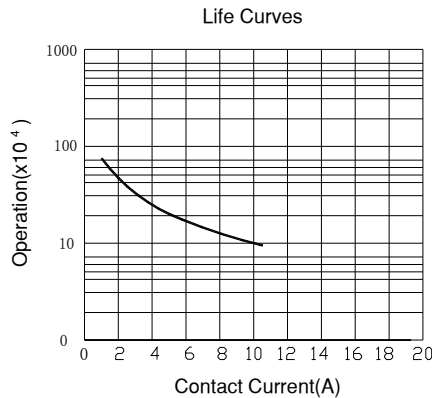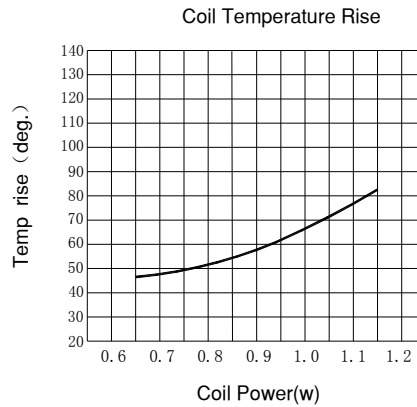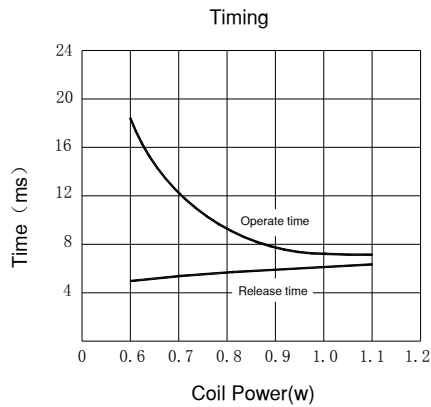

**OVERALL AND MOUNTING DIMENSIONS**

