


# AUTOMOTIVE RELAY



**AS408(CM6311)**

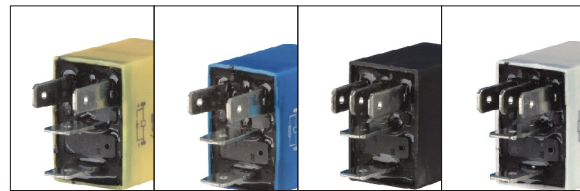

**1H**

**1H**

**1Z**

**1Z**

## Contact specification

Contact form	1H
Contact resistance	≤50mΩ ( 1A 6VDC )
Contact material	AgCdO AgSnO2
Contact capacity	30A 12VDC

## Technical specification


Insulation resistance	≥100MΩ ( 500VDC )
Dielectric strength	Between coil and contact ≥500VAC 1min
	Between open contacts ≥500VAC 1min
Operate / Release time	≤15ms/10ms
Terminal type	Quick terminal mounting

## Coil specification

Rated coil power	1.4W
------------------	------

## Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	Ω ± 10%
5	3.5	0.5	18
6	4.2	0.6	26
12	8.4	1.2	103
24	16.8	2.4	410



## Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

