


# PCB RELAY



**JQC-3F(T73)**



**JQC-3F(T73)**



## Contact specification

Contact form	1H, 1Z
Contact resistance	≤100mΩ ( 1A 6VDC )
Contact material	AgCdO AgSnO <sub>2</sub>
Contact capacity	7A 250VAC/30VDC 10A 250VAC/30VDC

## Technical specification

Insulation resistance	≥100MΩ
Dielectric strength	Between coil and contact ≥1500VAC 1min
	Between open contacts ≥750VAC 1min
Operate / Release time	≤10ms/5ms
Terminal type	PCB mounting

## Coil specification


Rated coil power	360mW(48VDC 0.51W)
------------------	--------------------

## Coil data


Nominal voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω ± 10%
3	2.25	0.3	25
5	3.75	0.5	70
6	4.5	0.6	100
9	6.8	0.9	225
12	9.0	1.2	400
18	13.5	1.8	900
24	19.0	2.4	1600
48	36.0	4.8	4500

## Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

JQC-3F(T73) Outline dimension

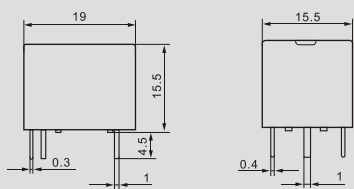

JQC-3F(T73) Mounting holes (Bottom view)

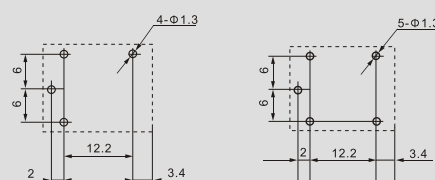

JQC-3F(T73) Wiring diagram (Bottom view)

