

特性 Features

- 40A 触点切换能力
- 触点与线圈间耐压 2.5KV
- 适用于各类型电路控制
- 防震性能优越
- 40A Contact change-over Capacity
- The Voltage endurance is 2.5KV
- between contact and coil
- Suitable for Control of Kinds of Circuits
- Excellent Shake Resistance Performance
- With Couple Socket



JD1939

汽车继电器 Automotive Relay

JD1939 1H DC12V

线圈电压 Coil Voltage 5,6,12,24VDC

触点形式 Contact Ratings 1H

继电器型号 Relay type

触点参数 Contact Ratings

触点形式 Contact Ratings	1H
接触电阻 Contact Resistance	50mΩ(1A 6VDC)
触点材料 Contact Material	银合金 AgCdO
触点负载(阻性)Contact capacity	22A 250VAC/30VDC

性能参数 Specification

绝缘电阻 Insulation Resistance	1000MΩ.500VDC
介质耐压 Dielectric Strength	线圈与触点间 BCC 500V 1分钟 1 min
	断开触点间 BOC 500V 1分钟 1 min
动作时间 Operate Time	15ms/10ms
引出端方式 Terminal Type	快连接式引出端 Terminal


线圈参数 Coil Ratings

额定线圈功率 Nominal Coil Power	1.8W
---------------------------	------

线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	吸合电压 Pull-in Voltage VDC	释放电压 Release Voltage VDC	线圈电阻 Coil Resistance Ω: ±10%
5	3.50	0.50	16
6	4.20	0.60	18
12	8.40	1.20	80
24	16.8	2.40	324

外形图、接线图、安装孔尺寸 Dimension.Bottom View

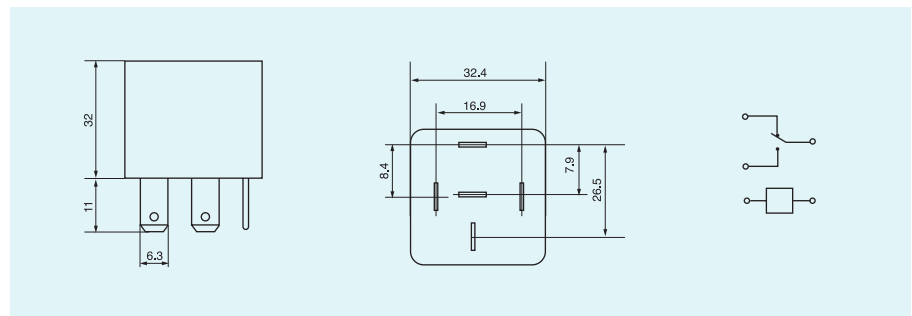

性能曲线图 Reference Data

