


特性 Features

- 30A 触点切换能力
- 具有敞开式、防尘罩式和塑封式
- 30A carrying current
- SPST-NO& SPDT
- PCB

电路板式继电器 PCB Relay



线圈电压 Coil Voltage : 5,6,9,12,24,48,110VDC
触点形式 Contact Ratings : 1H,1D,1Z 无 NIL: 1C
继电器型号 Relay type

触点参数 Contact Ratings

触点形式 Contact Ratings	1H 1D 1Z
接触电阻 Contact Resistance	50mΩ(at 1A 6VDC)
触点材料 Contact Material	银合金 Silver Alloy
触点负载(阻性)Contact capacity	1H:30A 240VAC/28VDC 1D:15A240VAC/28VDC 1Z: 20A240VAC/28VDC

性能参数 Specification

绝缘电阻 Insulation Resistance	100MΩ.500VDC
介质耐压 Dielectric Strength	线圈与触点间 BCC 1500V 1分钟 1 min
	断开触点间 BOC 1500V 1分钟 1 min
动作时间 Operate Time	15ms/10ms
引出端方式 Terminal Type	印制板引出端 PCB

线圈参数 Coil Ratings


额定线圈功率 Nominal Coil Power	0.9W
---------------------------	------




JQX-15F(T90)

线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	Coil Resistance at 20°C±10% 线圈阻值(Ω) 0.9W	最大吸合电压 Max Operate Voltage (VDC)	最小释放电压 Min Release Voltage (VDC)	最大过载电压 Max Applicable Voltage (VDC)
5	27	3.75	0.5	6.5
6	40	4.50	0.6	7.8
9	97	6.75	0.9	11.7
12	155	9.00	1.2	15.6
24	660	18.00	2.4	31.2
48	2560	36.00	4.8	62.4
110	13450	82.50	11.0	143.0

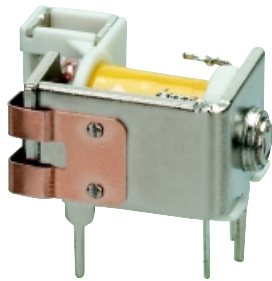

外形图、接线图、安装孔尺寸 Dimension.Bottom View

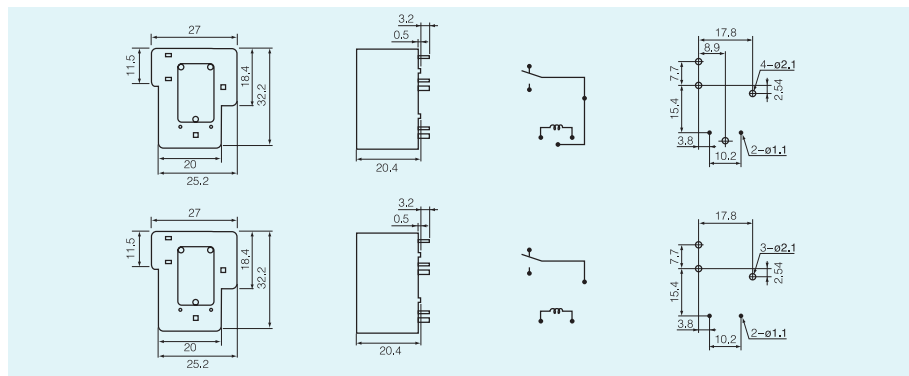

性能曲线图 Reference Data

