

特性 Features

- 具有敞开型、防尘罩型
- 备有匹配插座
- With open type,dust-proof cover type
- With matched socket

大功率继电器 Power Relay



线圈电压 Coil Voltage : 直流 DC: 5~110V
交流 AC: 6~240V
触点形式 Contact Ratings 2Z,2H,2D;3Z,3H,3D
触点电流 Contact Current A:40A B:30A
继电器型号 Relay Type



JQX-38F

触点参数 Contact Ratings

触点形式 Contact Ratings	2Z,2H,2D	3Z,3H,3D
接触电阻 Contact Resistance	100mΩ(1A 6VDC)	
触点材料 Contact Material	银合金 AgCdO	
触点负载(阻性)Contact capacity	30A/40A 250VAC/30VDC	30A/40A 250VAC/30VDC

性能参数 Specification

绝缘电阻 Insulation Resistance	1000MΩ.500VDC		
介质耐压 Dielectric Strength	线圈与触点间 BCC	2500V	1分钟 1 min
	断开触点间 BOC	1200V	1分钟 1 min
动作时间 Operate Time	25ms/15ms		
引出端方式 Terminal Type	快连接式引出端 PCB		

线圈参数 Coil Ratings

额定线圈功率 Nominal Coil Power	DC2W~2.5W AC4.5VA
---------------------------	-------------------



线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	吸合电压 Pull-in Voltage VDC	释放电压 Release Voltage VDC	线圈电阻 Coil Resis- tance Ω: ±10%	额定电压 Nominal Voltage VAC	吸合电压 Pull-in Voltage VAC	释放电压 Release Voltage VAC	线圈电阻 Coil Resis- tance Ω: ±10%
12	8.40	1.20	57	12	9.60	3.60	10
24	16.8	2.40	230	24	19.2	7.20	40.3
48	33.6	4.80	2000	110	88.0	36.00	847
60	42.0	6.00	2850	220/240	176.0	72.00	3380



JQX-38F

外形图、接线图、安装孔尺寸 Dimension.Bottom View

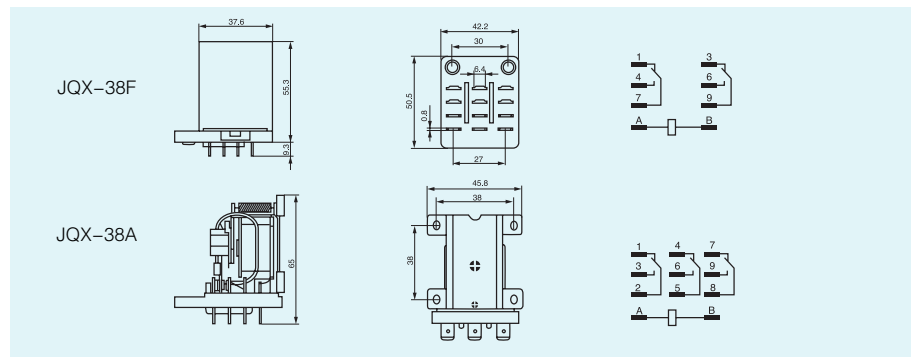

JQX-38F

性能曲线图 Reference Data

