


Features

- 100A Contact Change-over Capacity
- With Opening and Dust-proof Typ



QJX-62FH 100A

Power Relay

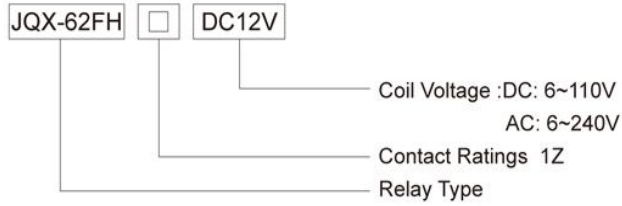

Contact Ratings

Contact Ratings	1Z,1H,1D
Contact Resistance	100mΩ(1A 6VDC)
Contact Material	AgCdO
Contact capacity	80A,100A 120A 250VAC/28VDC

Specification

Insulation Resistance	1000MΩ .500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/25ms
Terminal Type	The guide rail type


Coil Ratings

Nominal Coil Power	DC:2.0W AC:2.5VA
--------------------	------------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ± 10%
6	4.80	0.60	18	6	4.80	1.80	9
12	9.60	1.20	60	12	9.60	3.60	36
24	19.2	2.40	220	24	19.20	7.20	144
48	38.4	4.80	1152	48	38.40	14.4	576
60	48.0	6.00	1440	110	88.00	36.0	3500
110	88.0	11.0	6500	220/240	176.00	72.0	12000/14400

Dimension.Bottom View

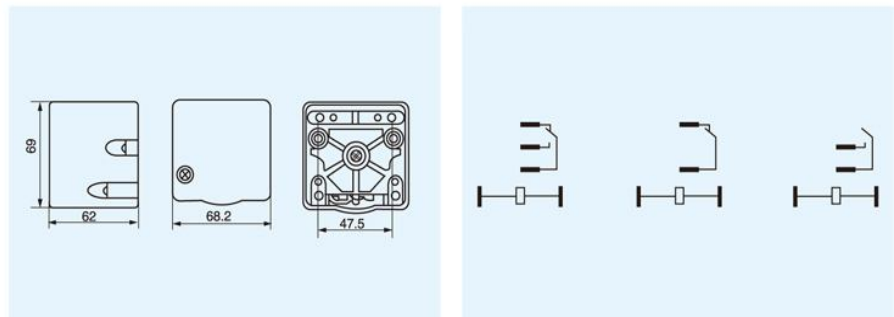

Reference Data

