

特性 Features

- 80A 触点切换能力
- 螺丝安装使用
- 具有敞开式、防尘罩式
- 80 A Contact Change-over capacity
- Swift Connection
- Fashioness of Guide Rail


大功率继电器 Power Relay

JQX-59F 1Z DC12V

线圈电压 Coil Voltage: 直流 DC: 5~220V; 交流 AC: 6~240V

触点形式 Contact Ratings 1Z

继电器型号 Relay Type

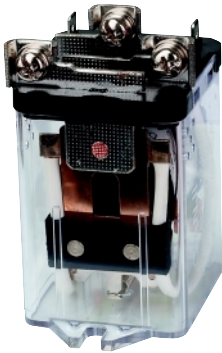

JQX-59F 1Z

触点参数 Contact Ratings

| | |
|---------------------------|------------------|
| 触点形式 Contact Ratings | 1Z, 1H, 1D |
| 接触电阻 Contact Resistance | 100mΩ(1A 6VDC) |
| 触点材料 Contact Material | 银合金 AgCdO |
| 触点负载(阻性) Contact capacity | 80A 250VAC/30VDC |

性能参数 Specification


| | |
|----------------------------|----------------------------|
| 绝缘电阻 Insulation Resistance | 1000MΩ.500VDC |
| 介质耐压 Dielectric Strength | 线圈与触点间 BCC 2500V 1分钟 1 min |
| | 断开触点间 BOC 1200V 1分钟 1 min |
| 动作时间 Operate Time | 25ms/25ms |
| 引出端方式 Terminal Type | 螺丝安装 Screw |

线圈参数 Coil Ratings

| | |
|---------------------------|--------------------|
| 额定线圈功率 Nominal Coil Power | DC: 3.6W AC: 4.4VA |
|---------------------------|--------------------|


线圈规格表 Coil Versions

| 额定电压 Nominal Voltage VDC | 吸合电压 Pull-in Voltage VDC | 释放电压 Release Voltage VDC | 线圈电阻 Coil Resis- tance Ω: ±10% | 额定电压 Nominal Voltage VAC | 吸合电压 Pull-in Voltage VAC | 释放电压 Release Voltage VAC | 线圈电阻 Coil Resis- tance Ω: ±10% |
|-----------------------------------|-----------------------------------|-----------------------------------|---|-----------------------------------|-----------------------------------|-----------------------------------|---|
| 6 | 4.80 | 0.60 | 10 | 6 | 4.80 | 1.80 | 8.27 |
| 12 | 9.60 | 1.20 | 40 | 12 | 9.60 | 3.60 | 32.7 |
| 24 | 19.2 | 2.40 | 160 | 24 | 19.20 | 7.20 | 130 |
| 48 | 38.4 | 4.80 | 640 | 48 | 38.40 | 14.4 | 523.6 |
| 60 | 48.0 | 6.00 | 2800 | 110 | 88.00 | 36.0 | 2750 |
| 110 | 88.0 | 11.0 | 9650 | 220/240 | 176.00 | 72.0 | 11000/13090 |

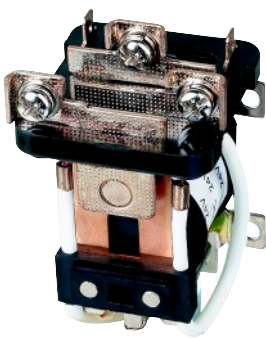

JQX-59F 1Z

外形图、接线图、安装孔尺寸 Dimension.Bottom View

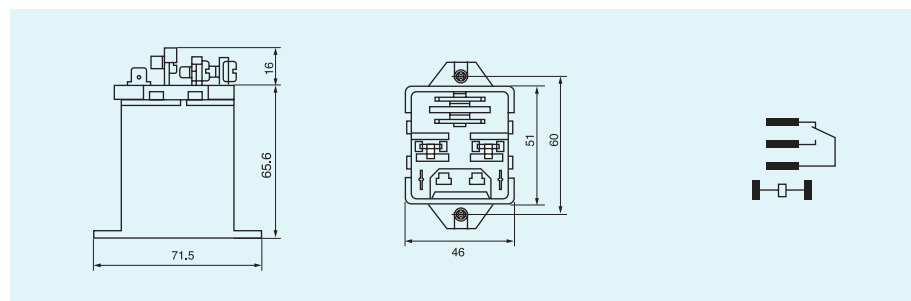

性能曲线图 Reference Data

