

Features

- 100A Contact Change-over Capacity
- With Opening and dust-proof Type

Power Relay

JQX-80F S DC24V

Coil Voltage : DC: 5~220V; AC: 6~240V
Contact Ratings 2Z
Relay Type



JQX-80F(JQX-59F)S

Contact Ratings

Contact Ratings	2Z,2H,2D
Contact Resistance	100mΩ(1A 6VDC)
Contact Material	AgCdO
Contact capacity	80A,100A, 120A 250VAC/30VDC

Specification

Insulation Resistance	1000MΩ .500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1200V 1 min
Operate Time	25ms/25ms
Terminal Type	Screw


Coil Ratings

Nominal Coil Power	DC:3.6W AC:4.4VA
--------------------	------------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ± 10%
6	4.80	0.60	10	6	4.80	1.80	8.27
12	9.60	1.20	40	12	9.60	3.60	32.7
24	19.2	2.40	160	24	19.20	7.20	130
48	38.4	4.80	640	48	38.40	14.4	523.6
60	48.0	6.00	1040	110	88.00	36.0	2750
110	88.0	11.0	3340	220/240	176.00	72.0	11000/13090

Dimension.Bottom View

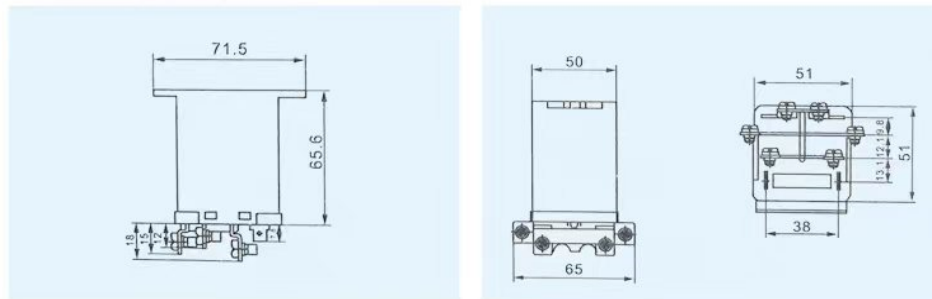

Reference Data

