


特性 Features

- 1A,3A 触点切换能力
- 超小型
- 标准双列直插引出脚
- 1A,3A Carrying current
- Subminiature
- DIP standard terminals Au-clad contacts

电路板式继电器 PCB Relay

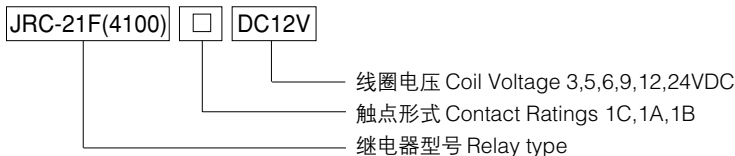

触点参数 Contact Ratings

触点形式 Contact Ratings	1C	1A	1B
接触电阻 Contact Resistance	50mΩ(at 1A 6VDC)		
触点材料 Contact Material	银合金 Silver Alloy		
触点负载(阻性)Contact capacity	3A 250VAC/3A 30VDC		

性能参数 Specification

绝缘电阻 Insulation Resistance	100MΩ.500VDC		
介质耐压 Dielectric Strength	线圈与触点间 BCC	1000V	1分钟 1 min
	断开触点间 BOC	500V	1分钟 1 min
动作时间 Operate Time	5ms/5ms		
引出端方式 Terminal Type	印制板引出端 PCB		



JRC-21F(4100)


线圈参数 Coil Ratings

额定线圈功率 Nominal Coil Power	0.15W,0.2W,0.36W
---------------------------	------------------

线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	Coil Resistance at 20°C±10% 线圈阻值(Ω)			最大吸合电压 Max Operate Voltage (VDC)	最小释放电压 Min Release Voltage (VDC)	最大过载电压 Max Applicable Voltage (VDC)
	0.15W	0.2W	0.36W			
3	60	45	25	2.25	0.3	3.9
5	167	120	70	3.75	0.5	6.5
6	240	180	100	4.50	0.6	7.8
9	540	400	220	6.75	0.9	11.7
12	960	720	400	9.00	1.2	15.6
24	3840	2880	1600	18.00	2.4	31.2

外形图、接线图、安装孔尺寸 Dimension.Bottom View

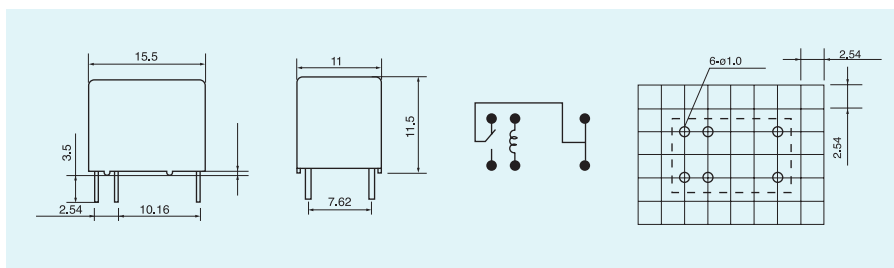

性能曲线图 Reference Data

