


特性 Features

- 2A 触点切换能力
- 高灵敏度，线圈功耗仅为 150mW
- 标准双列直插引出脚
- 镀金触点 • 超小型 • 塑封型
- 2A Carrying current
- Gilt contact type
- Subminiature • Plastic Package
- DIP standard trminals Au-clad contacts

电路板式继电器 PCB Relay

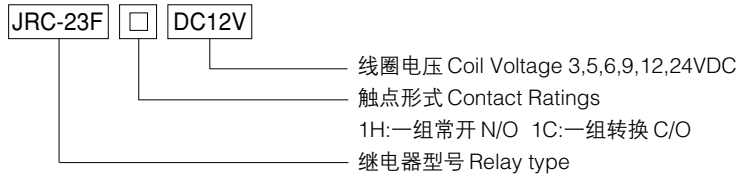

触点参数 Contact Ratings

触点形式 Contact Ratings	1C
接触电阻 Contact Resistance	100mΩ(at A1 6VDC)
触点材料 Contact Material	银合金 Silver Alloy
触点负载(阻性)Contact capacity	2 A 120VAC/24VDC

性能参数 Specification

绝缘电阻 Insulation Resistance	100MΩ.500VDC
介质耐压 Dielectric Strength	线圈与触点间 BCC 1000VAC 1分钟 1 min
	断开触点间 BOC 400V 1分钟 1 min
动作时间 Operate Time	5ms/5ms
引出端方式 Terminal Type	印制板引出端 PCB



JRC-23F


线圈参数 Coil Ratings

额定线圈功率 Nominal Coil Power	0.15W,0.2W,0.36W
---------------------------	------------------

线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	Coil Resistance at 20°C±10% 线圈阻值(Ω)			最大吸合电压 Max Operate Voltage (VDC)	最小释放电压 Min Release Voltage (VDC)	最大过载电压 Max Applicable Voltage (VDC)
	0.15W	0.2W	0.36W			
3	60	45	25	2.25	2.25	3.9
5	167	120	70	3.75	3.75	6.5
6	240	180	100	4.50	4.50	7.8
9	540	400	220	6.75	6.75	11.7
12	960	720	400	9.00	9.00	15.6
24	3840	2880	1600	18.00	18.00	31.2

外形图、接线图、安装孔尺寸 Dimension.Bottom View

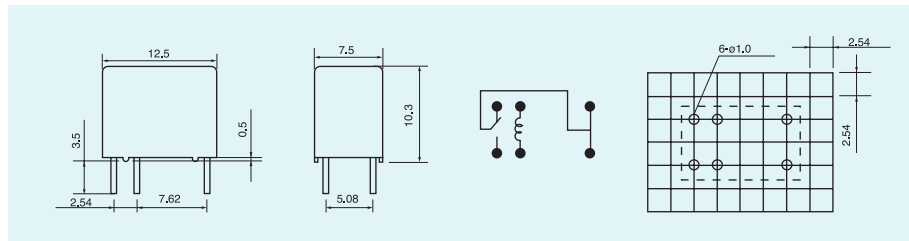

性能曲线图 Reference Data

