

特性 Features

- 多种类型继电器包括内置发光二极管动作指示, 试验按钮
- 具有二、四组转换触点形式
- 具有多种引出脚方式 镀金触点型
- 透明防尘罩、多种安装方式
- 备有各种插座供选用
- Various relays, including LED, test button
- With 2Z, 4Z contact forms
- With various terminal types
- Gilt contact types
- Transparent dust-proof cover, Various mounting types
- Various sockets available



LY2J



LY2NJ

通用电磁继电器 General-purpose Relay



- 线圈电压 Coil Voltage: 直流 DC 6~220V 交流 AC 6~380V
- 蓝色外壳 Blue Color Outer Covering
- 指示灯 LED
- 触点形式 Contact Ratings: 2Z
- 继电器型号 Relay type

触点参数 Contact Ratings

触点形式 Contact Ratings	2Z, 2H, 2D
接触电阻 Contact Resistance	50mΩ(1A 6VDC)
触点材料 Contact Material	银合金 Silver Alloy
触点负载(阻性) Contact capacity	10A/250VAC 28VDC


性能参数 Specification

绝缘电阻 Insulation Resistance	≥ 500MΩ, 500VDC
介质耐压 Dielectric Strength	线圈与触点间 BCC 1500V 1分钟 1min
	断开触点间 BOC 1000V 1分钟 1min
	触点组间 COC 1500V 1分钟 1min
动作时间 Operate Time	20ms/15ms
引出端方式 Terminal Type	插拔式 Socket


线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	吸合电压 Pull-in Voltage VDC	释放电压 Release Voltage VDC	线圈电阻 Coil Resistance Ω: ±10%	额定电压 Nominal Voltage VAC	吸合电压 Pull-in Voltage VAC	释放电压 Release Voltage VAC	线圈电阻 Coil Resistance Ω: ±10%
5	4.0	0.50	30	6	4.80	1.80	12
6	4.8	0.60	40	12	9.60	3.60	42
12	9.6	1.20	160	24	19.2	7.20	168
24	19.2	2.40	640	48	38.4	14.4	675
48	38.4	4.80	2560	110	96.0	36.0	3500
110	88.0	11.0	12100	220/240	176.0	66.0	14000/16500

外形图、接线图、安装孔尺寸 Dimension. Bottom View

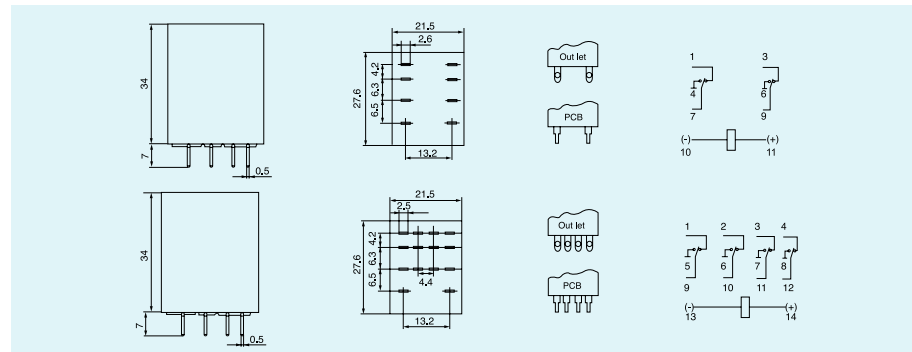

性能曲线图 Reference Data

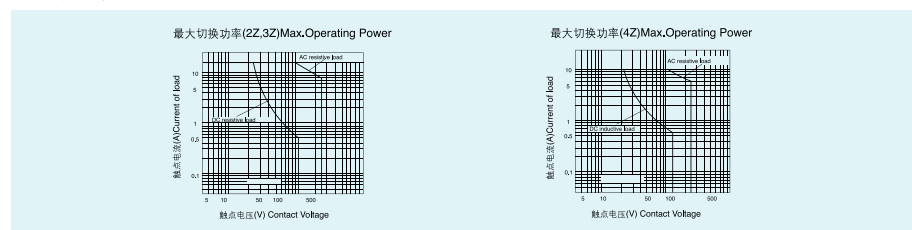

特性 Features

- 多种类型继电器, 包括内置发光二极管试验按钮
- 10A 触点切换能力
- 备有匹配插座选用
- A wide range of relay versions, test button available
- 10A Carrying Current
- Matched Sockets Available



LY3NJ



LY4NJ

阻性 General-purpose Relay



- 线圈电压 Coil Voltage: 直流 DC 6~220V 交流 AC 6~380V
- 蓝色外壳 Blue Color Outer Covering
- 指示灯 LED
- 触点形式 Contact Ratings: 3Z,4Z
- 继电器型号 Relay type

触点参数 Contact Ratings

触点形式 Contact Ratings	3Z,3H,3D/4Z,4H,4D
接触电阻 Contact Resistance	50mΩ(1A 6VDC)
触点材料 Contact Material	线圈电 Silver Alloy
触点负载(阻性)Contact capacity	10A/250V 28VDC

性能参数 Specification

绝缘电阻 Insulation Resistance	500MΩ.500VDC
介质耐压 Dielectric Strength	线圈与触点间 BCC 1500V 1分钟 1 min
	断开触点间 BOC 1000V 1分钟 1 min
	触点组间 COC 1500V 1分钟 1 min
动作时间 Operate Time	25ms/15ms
引出端方式 Terminal Type	插拔式 Socket


线圈参数 Coil Ratings

额定线圈功率 Nominal Coil Power	0.9W/1.0~1.3VA
---------------------------	----------------

线圈规格表 Coil Versions

额定电压 Nominal Voltage VDC	吸合电压 Pull-in Voltage VDC	释放电压 Release Voltage VDC	线圈电阻 Coil Resistance Ω: ±10%	额定电压 Nominal Voltage VAC	吸合电压 Pull-in Voltage VAC	释放电压 Release Voltage VAC	线圈电阻 Coil Resistance Ω: ±10%
5	4.8	0.50	30	6	4.80	1.80	12
6	4.8	0.60	40	12	9.60	3.60	42
12	9.6	1.20	160	24	19.2	7.20	168
24	19.2	2.40	640	48	38.4	14.4	675
48	38.4	4.80	2560	110	96.0	36.0	3500
110	88.0	11.0	12100	220/240	176.0	66.0	14000/16500

外形图、接线图、安装孔尺寸 Dimension.Bottom View

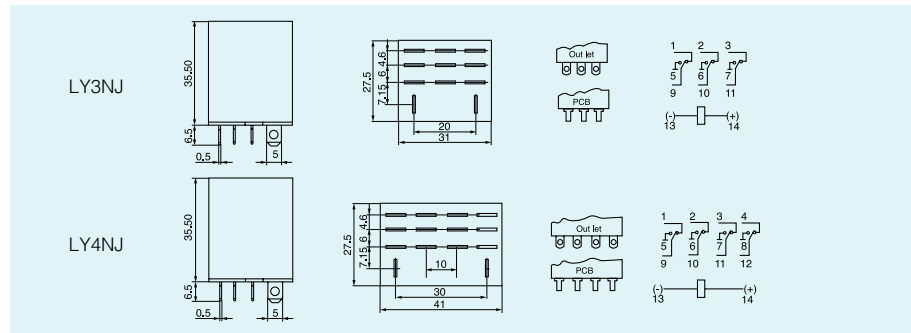

性能曲线图 Reference Data

