

**特性 Features**

- 10A 触点切换能力
- 电气寿命至少为 10 万次
- 具有两组、三组转换触点形式
- 标准电子管插脚
- 备有匹配插座选用
- 10A Contact operating capacity
- Mechanical life ≥ 100000
- With 2Z,3Z contact forms
- Standard tube terminal
- With matched socket



MK2P-1



MK3P-1

通用电磁继电器 General-purpose Relay



**触点参数 Contact Ratings**

|                          |               |              |
|--------------------------|---------------|--------------|
| 触点形式 Contact Ratings     | 2Z            | 3Z           |
| 接触电阻 Contact Resistance  | 50mΩ(1A 6VDC) |              |
| 触点材料 Contact Material    | 银合金 AgCdO     |              |
| 触点负载(阻性)Contact capacity | 10A           | 10A          |
|                          | 28VDC/250VAC  | 28VDC/250VAC |

**性能参数 Specification**

|                            |                |       |            |
|----------------------------|----------------|-------|------------|
| 绝缘电阻 Insulation Resistance | 500MΩ.500VDC   |       |            |
| 介质耐压 Dielectric Strength   | 线圈与触点间 BCC     | 1500V | 1 分钟 1 min |
|                            | 断开触点间 BOC      | 1000V | 1 分钟 1 min |
| 动作时间 Operate Time          | 20ms/20ms      |       |            |
| 引出端方式 Terminal Type        | 标准电子管插脚 Socket |       |            |


**线圈参数 Coil Ratings**

|                           |            |
|---------------------------|------------|
| 额定线圈功率 Nominal Coil Power | 1.5W/2.5VA |
|---------------------------|------------|

**线圈规格表 Coil Versions**

| 额定电压<br>Nominal Voltage<br>VDC | 吸合电压<br>Pull-in Voltage<br>VDC | 释放电压<br>Release Voltage<br>VDC | 线圈电阻<br>Coil Resistance<br>Ω: ±10% | 额定电压<br>Nominal Voltage<br>VAC | 吸合电压<br>Pull-in Voltage<br>VAC | 释放电压<br>Release Voltage<br>VAC | 线圈电阻<br>Coil Resistance<br>Ω: ±10% |
|--------------------------------|--------------------------------|--------------------------------|------------------------------------|--------------------------------|--------------------------------|--------------------------------|------------------------------------|
| 6                              | 4.8                            | 0.60                           | 22.5                               | 6                              | 4.80                           | 1.80                           | 4.5                                |
| 12                             | 9.6                            | 1.20                           | 50.6                               | 12                             | 9.60                           | 3.60                           | 18                                 |
| 24                             | 19.2                           | 2.40                           | 90                                 | 24                             | 19.2                           | 7.20                           | 72                                 |
| 48                             | 38.4                           | 4.8                            | 810                                | 48                             | 38.4                           | 14.4                           | 288                                |
| 100                            | 80.0                           | 10.0                           | 7550                               | 110/120                        | 88.0                           | 36.0                           | 1512                               |
| 110                            | 88.0                           | 11.0                           | 9000                               | 220/240                        | 176                            | 72.0                           | 6050/7200                          |

**外形图、接线图、安装孔尺寸 Dimension.Bottom View**

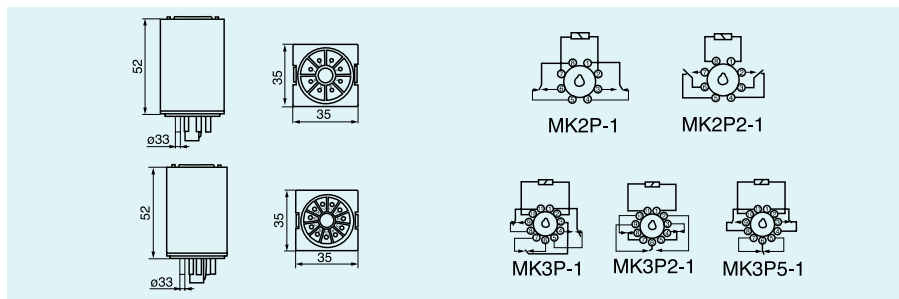

**性能曲线图 Reference Data**

