


**Relay socket** **38FA**


- Socket with screw terminal.
- Easy relay replacement on a densely filled DIN rail.
- Mounting on a 35mm DIN rail.
- The socket can be used as a connector for diagnostics.

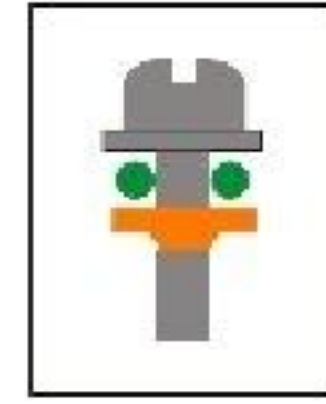


**Specification**

Rated current	40A
Rated voltage	300VAC
Dielectric strength between contacts	2000VAC, 50-60Hz
Dielectric strength between contact and coil	2000VAC, 50-60Hz
Insulation resistance (at 500VDC)	1000MOM
Conductor material	H62
Mounting distance	0mm tight installation
Ambient temperature range	from -25°C to +55°C
Type of wire connection	Screw clamp
Terminal protection degree	IP20
Screw torque	1,0 Nm
External connection wire	0,5 - 2,5mm <sup>2</sup> 20 - 14 AWG
Flame retardant rating	UL94-V0
Weight	80g
Packing	10pcs

**Outline dimensions (mm)**

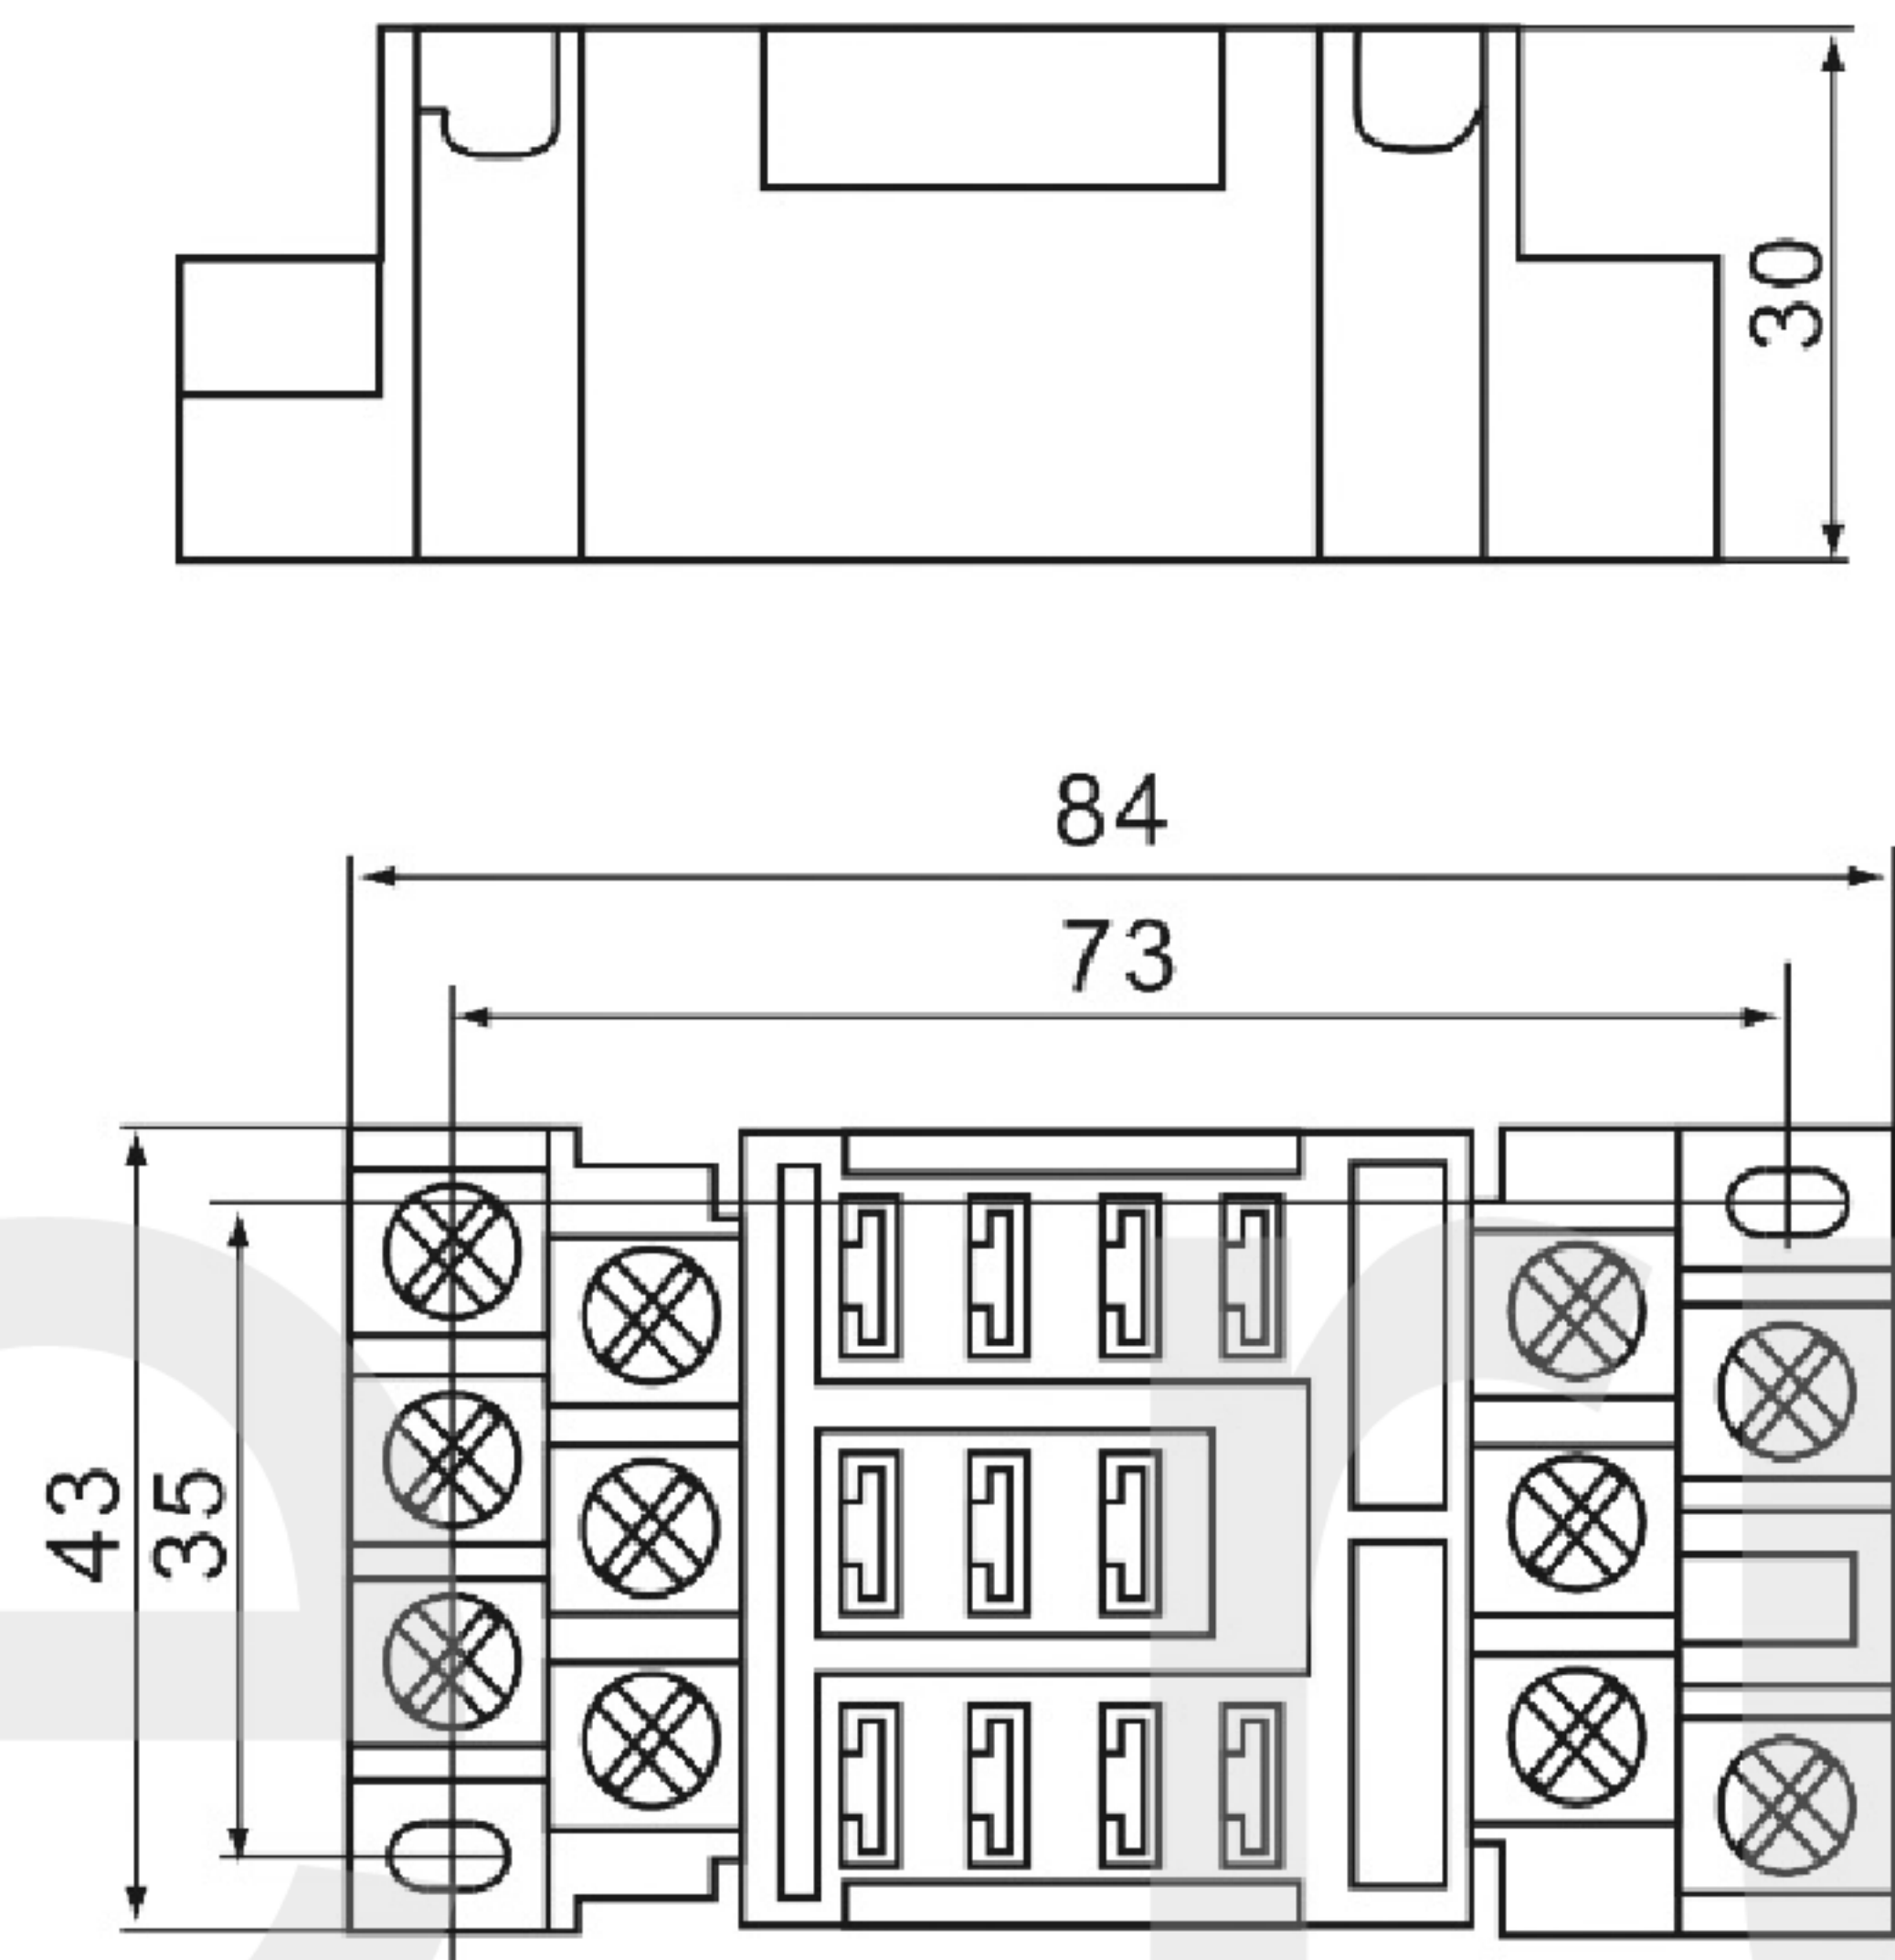

**Wiring diagram**

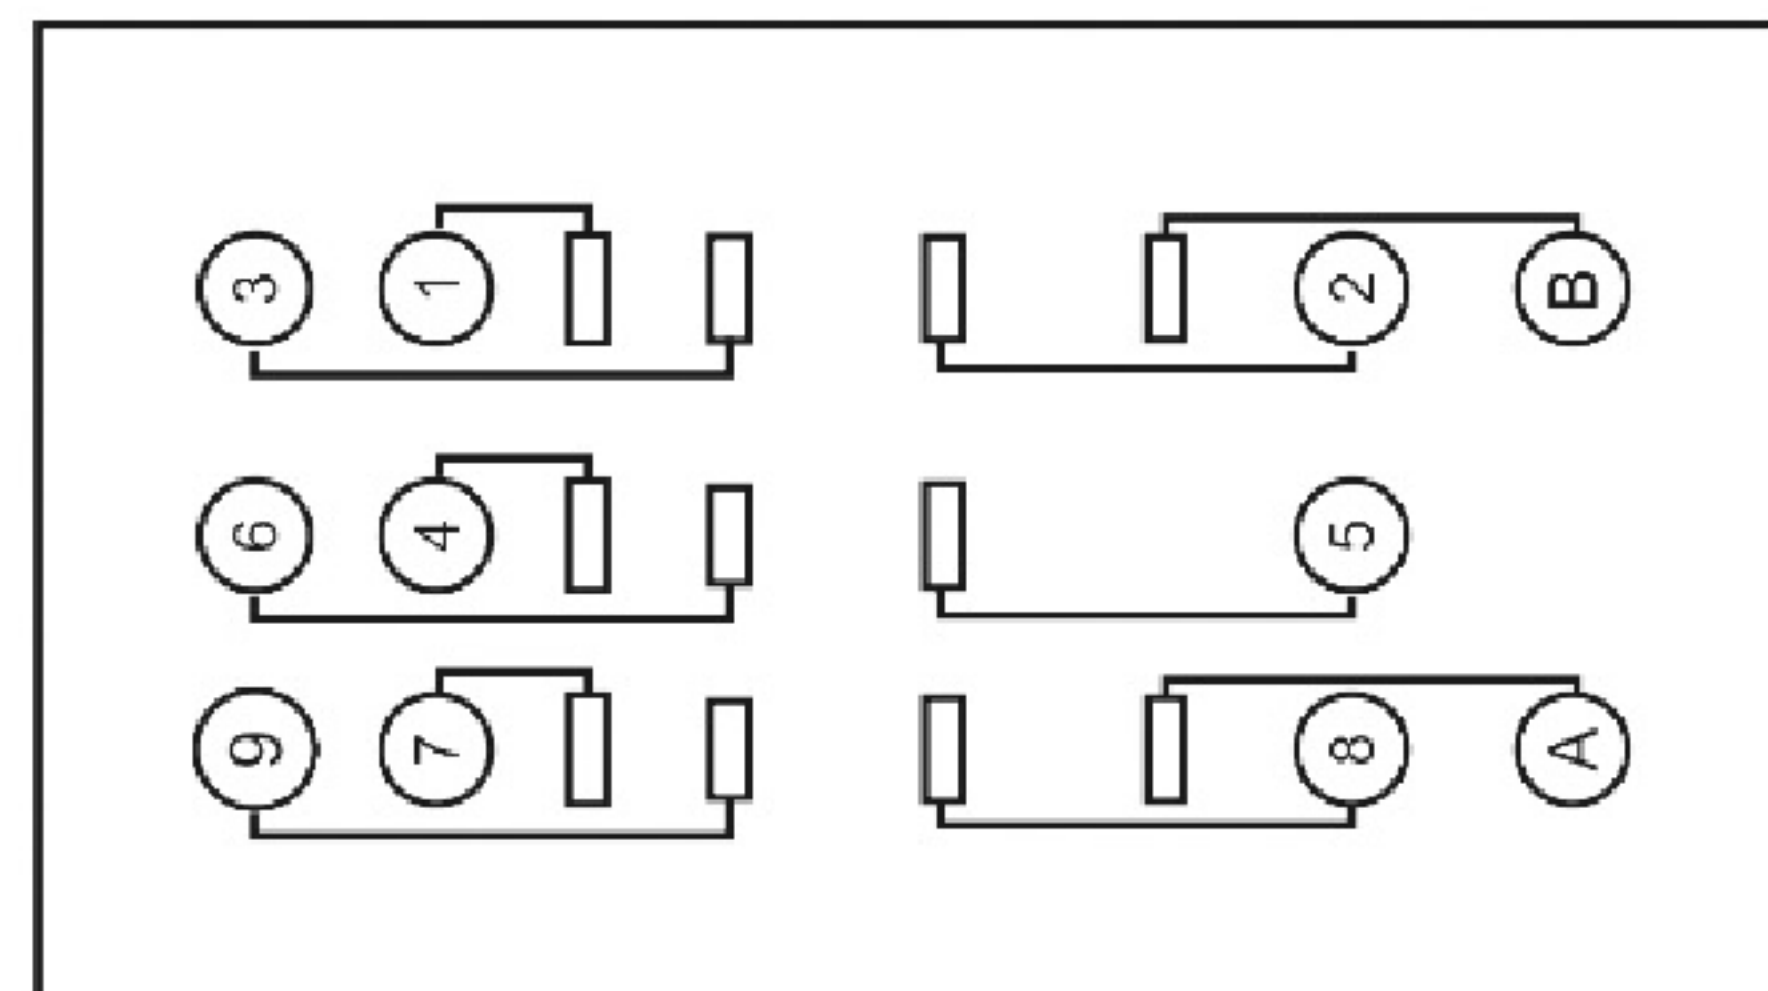

1) Permissible accuracy of product execution: dimensions ≤ 1 mm - tolerance ± 0.2 mm, sizes from 1 to 5 mm - tolerance ± 0.3 mm, dimensions > 5 mm - tolerance ± 0.4 mm.

2) Tolerance of mounting holes ± 0.1 mm.

Note:

The information in this document is for reference only and is subject to change without notice.