


**Auto relay socket**

**CS-3770B**


- Socket with wires.
- Easy relay replacement.
- The socket can be used as a connector for diagnostics.

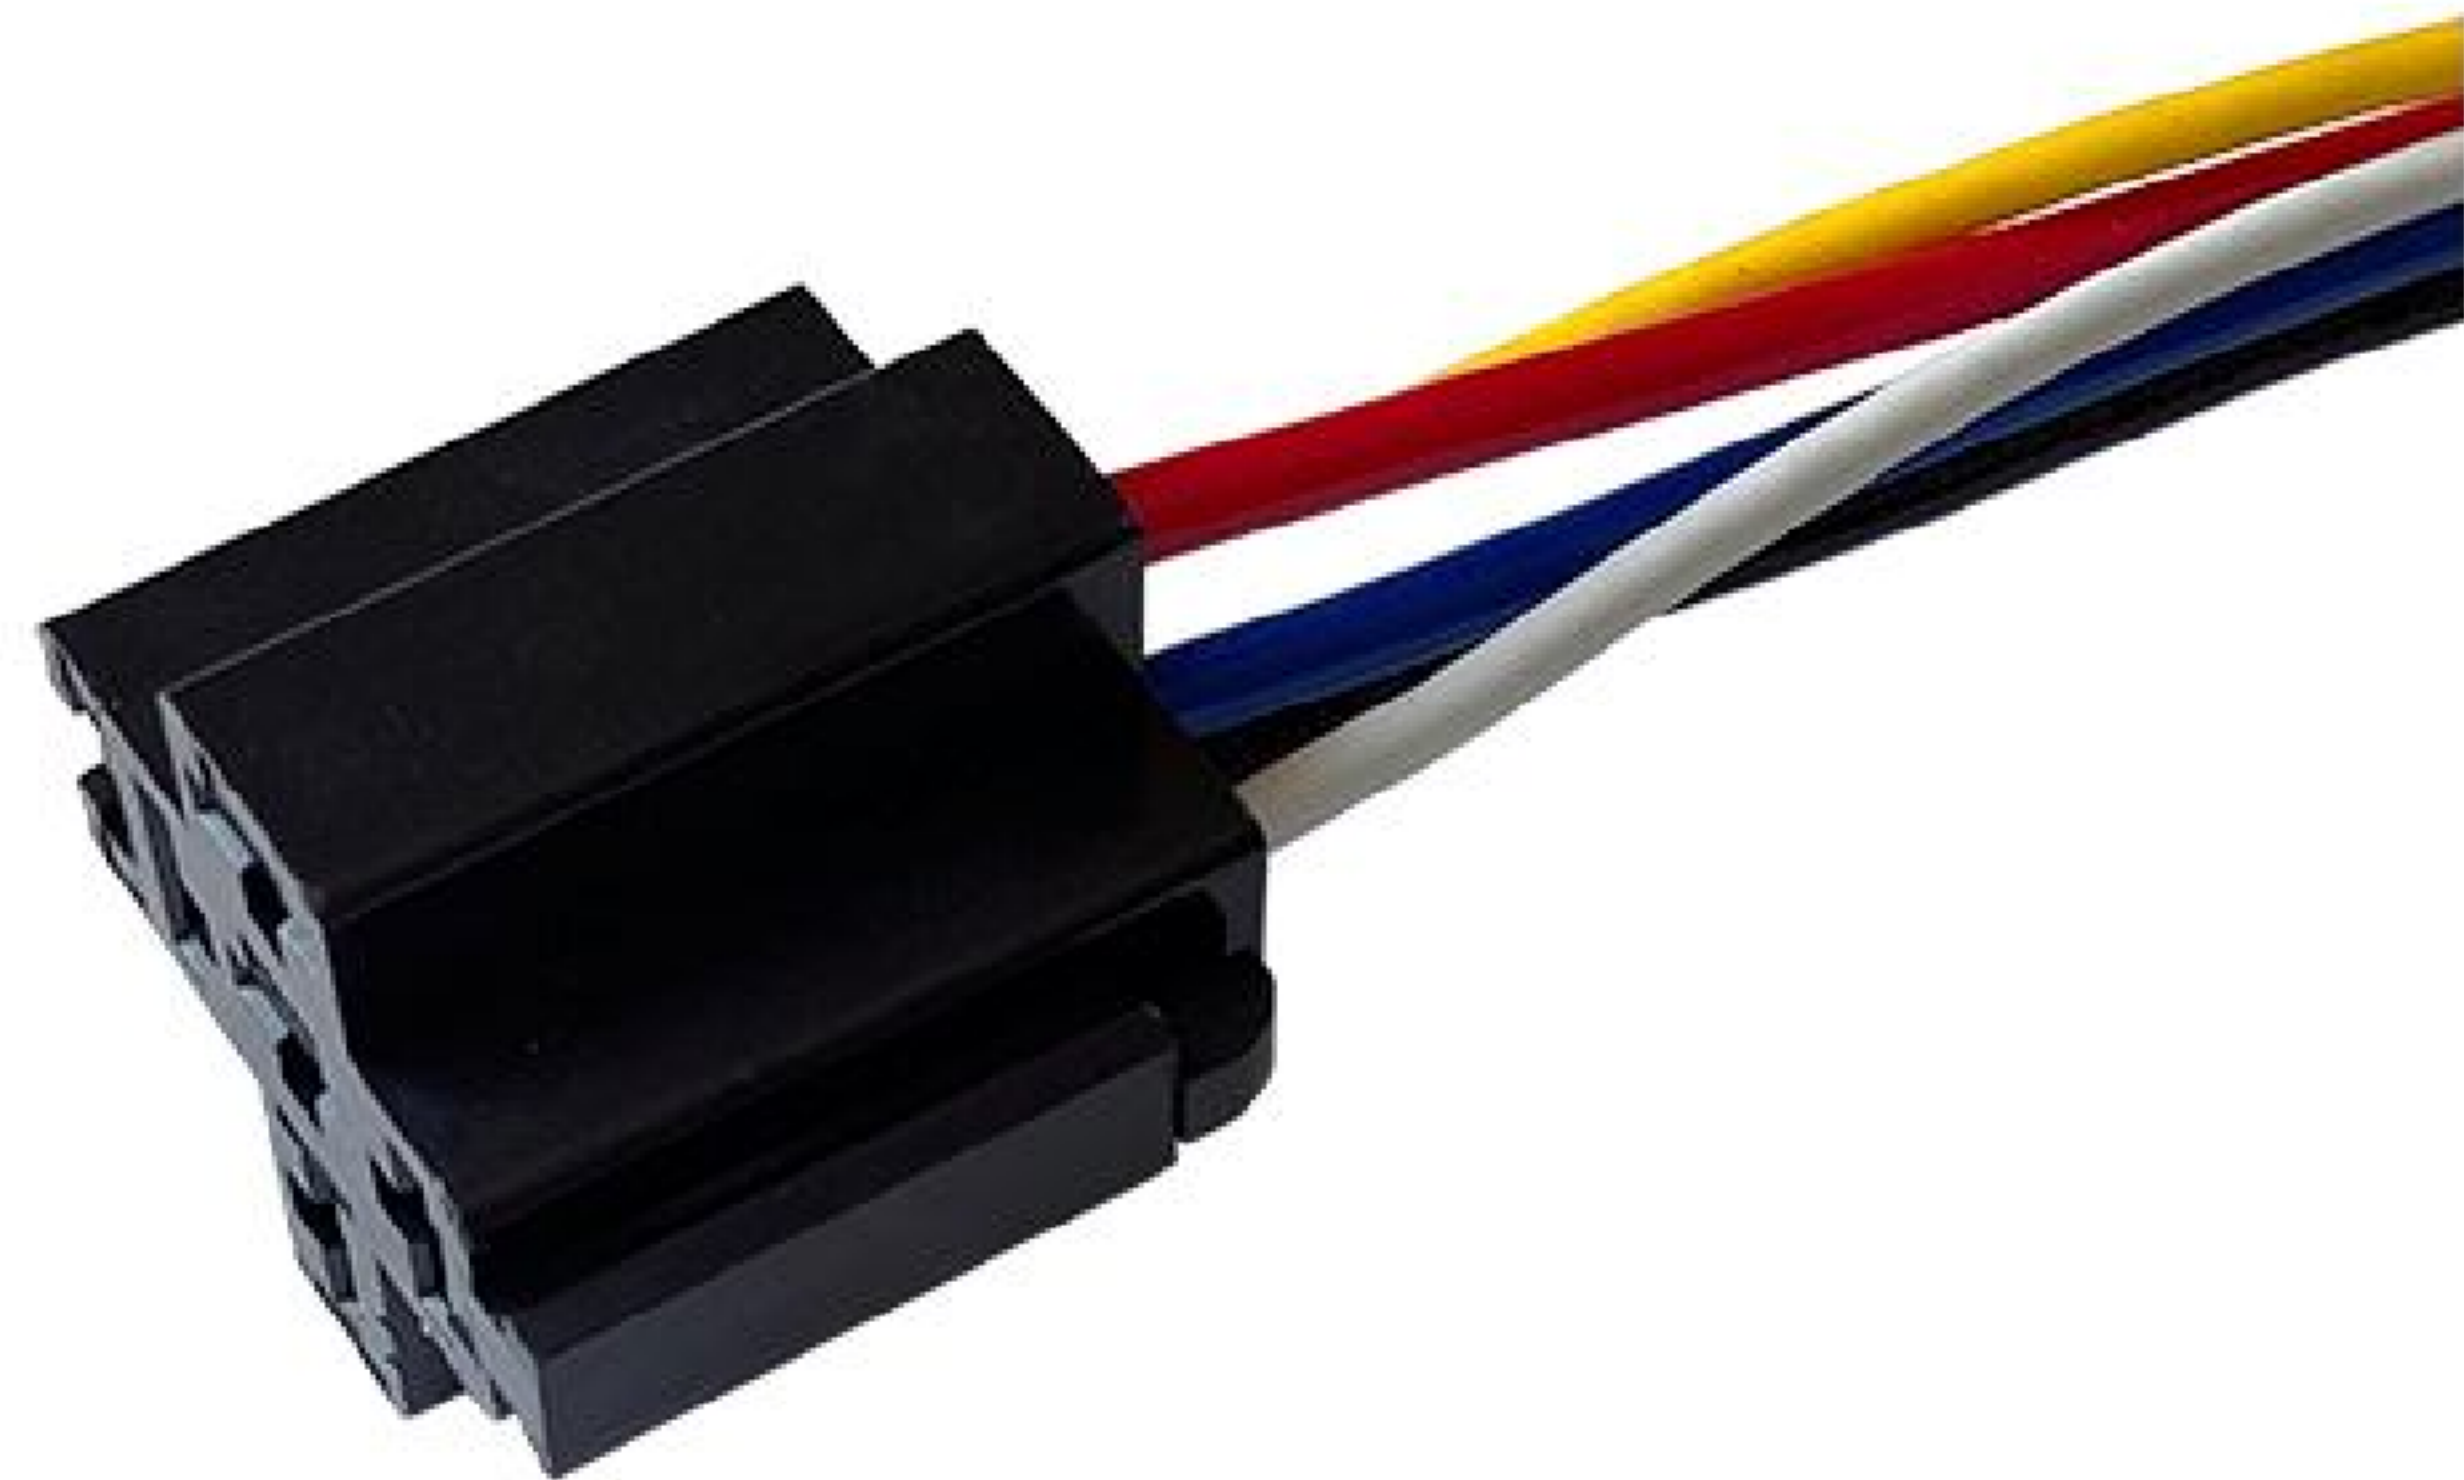


**Specification**

Rated current	40A
Rated voltage	30VDC
Dielectric strength	2000VAC
Insulation resistance (at 500VDC)	1000MOm
Ambient temperature range	from -25°C to +55°C
Cable length	18,5cm
Pin85, Pin86	227 iec 08 (RV-90) 0,75mm <sup>2</sup>
Pin30, Pin87, Pin87a	60227 iec 08 (RV-90) 1,5mm <sup>2</sup>
Flame retardant rating	UL94-V0
Weight	28g
Packing	100pcs

**Outline dimensions (mm)**

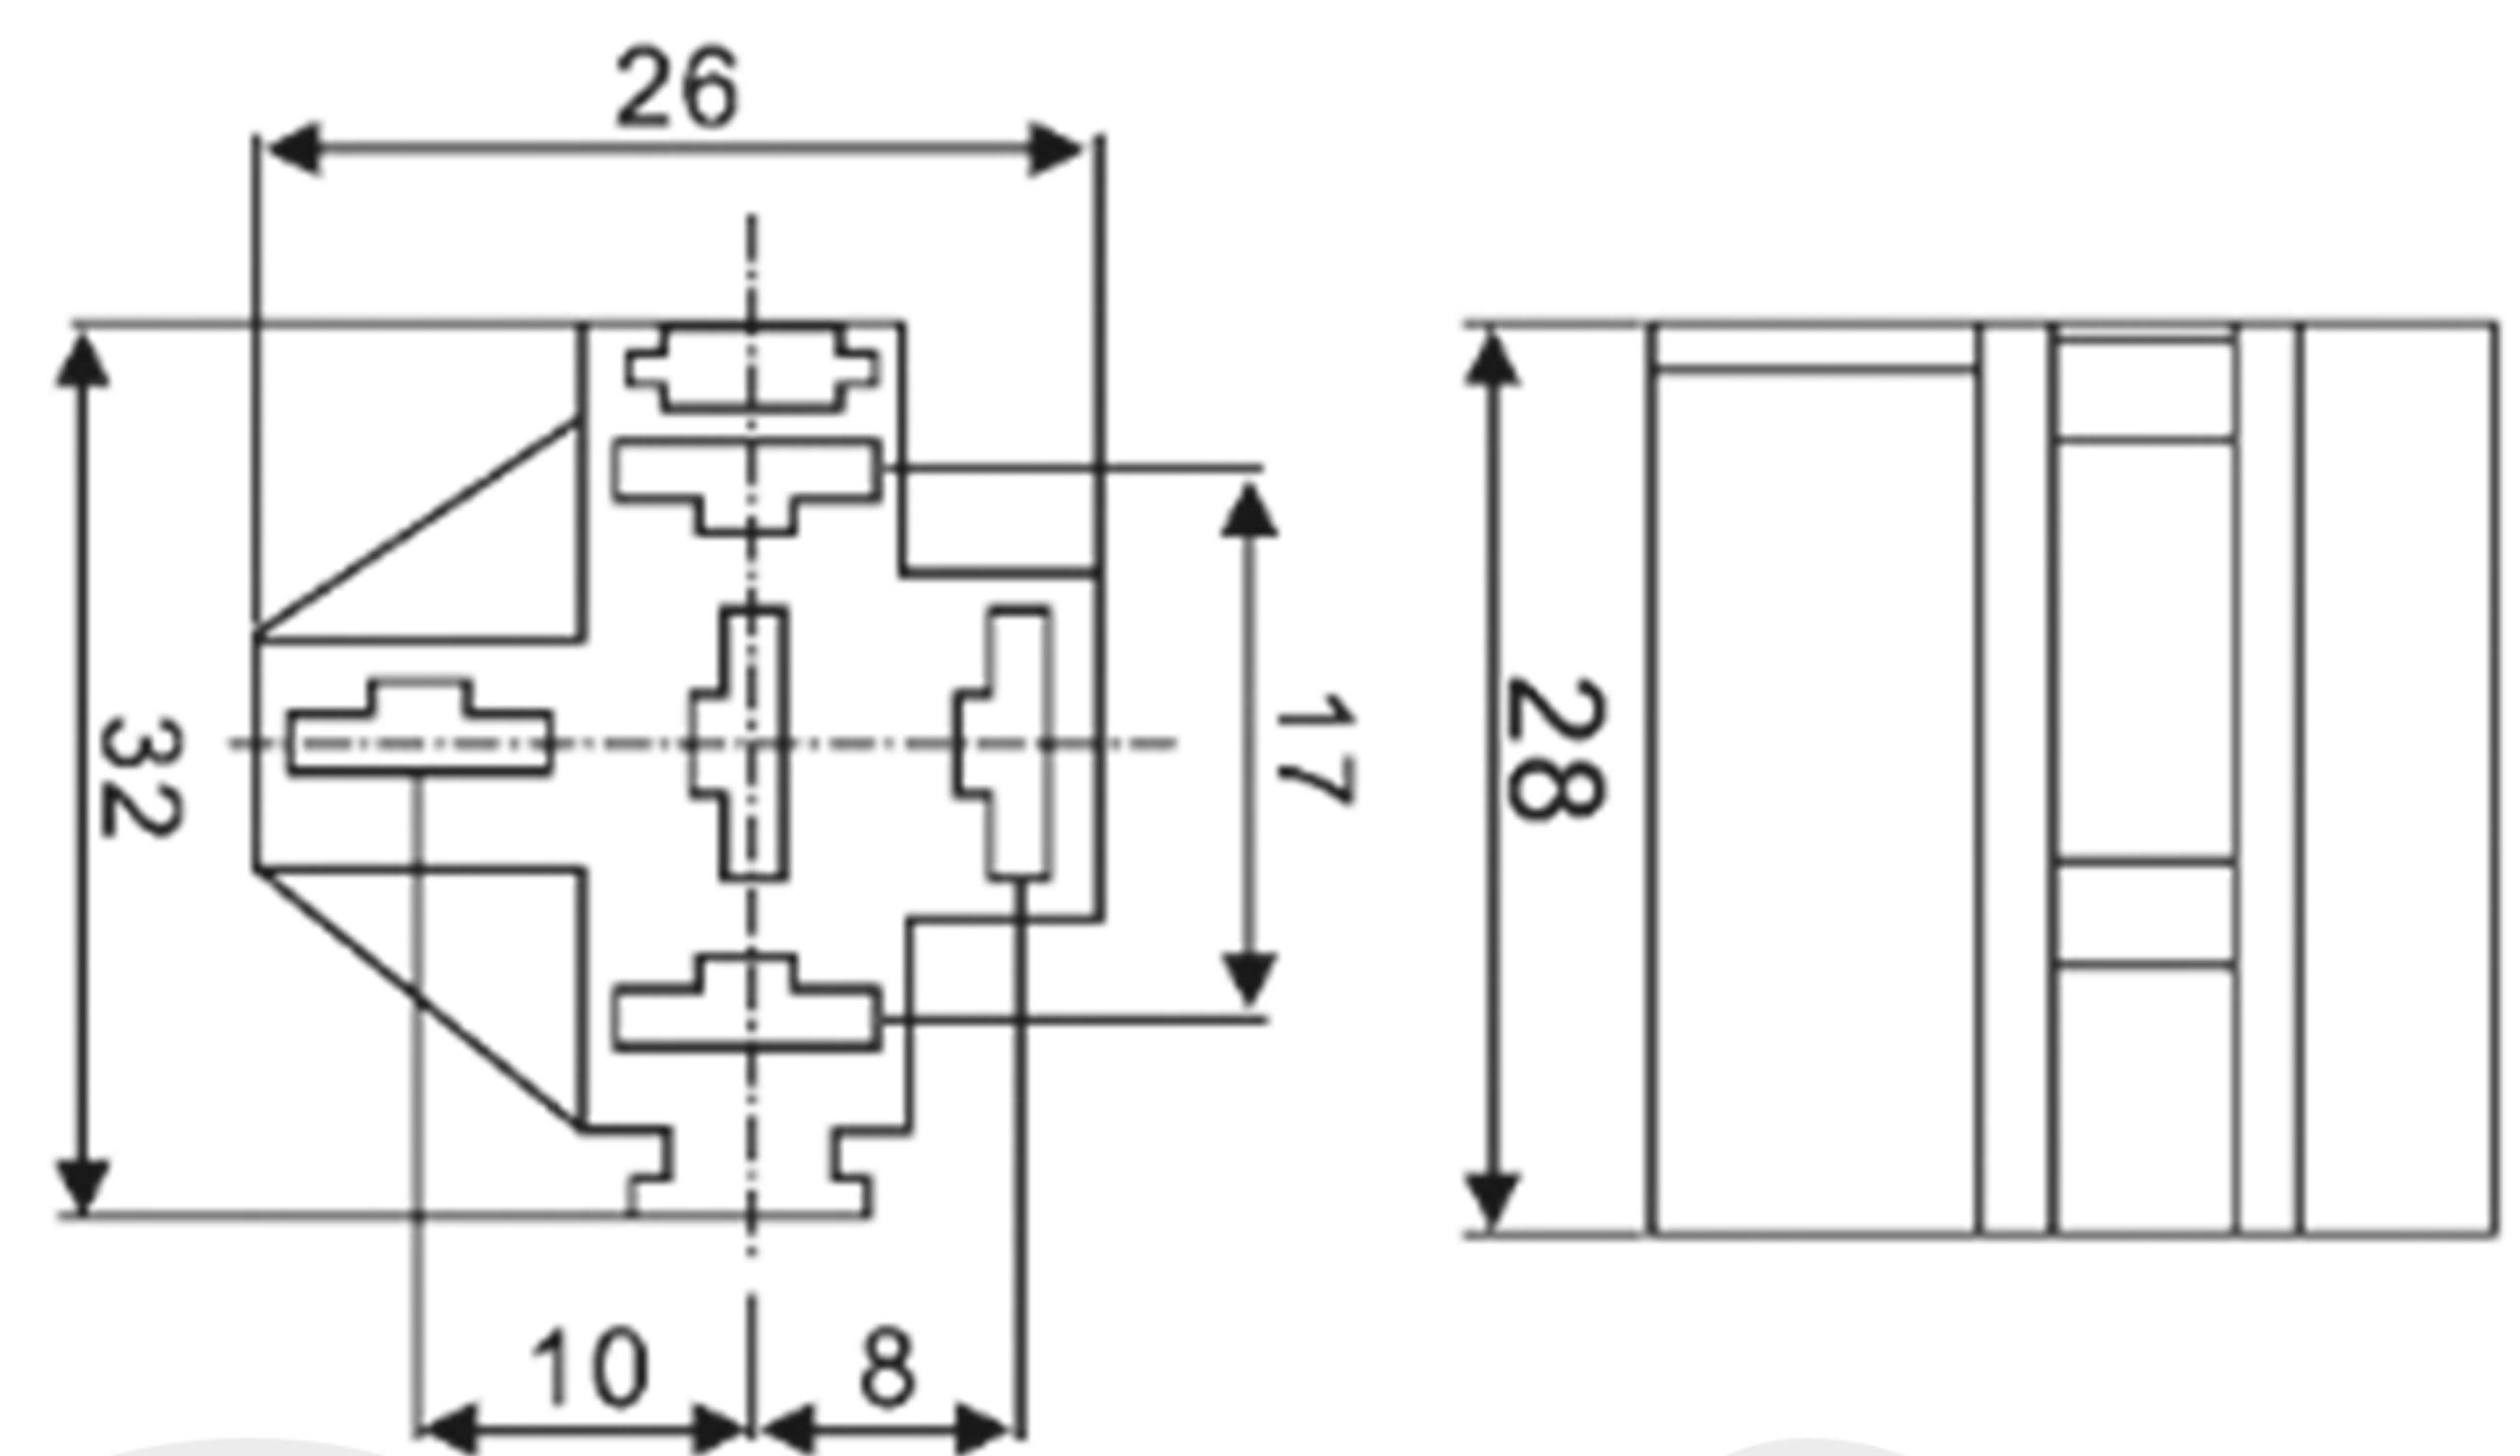

**Wiring diagram (bottom view)**

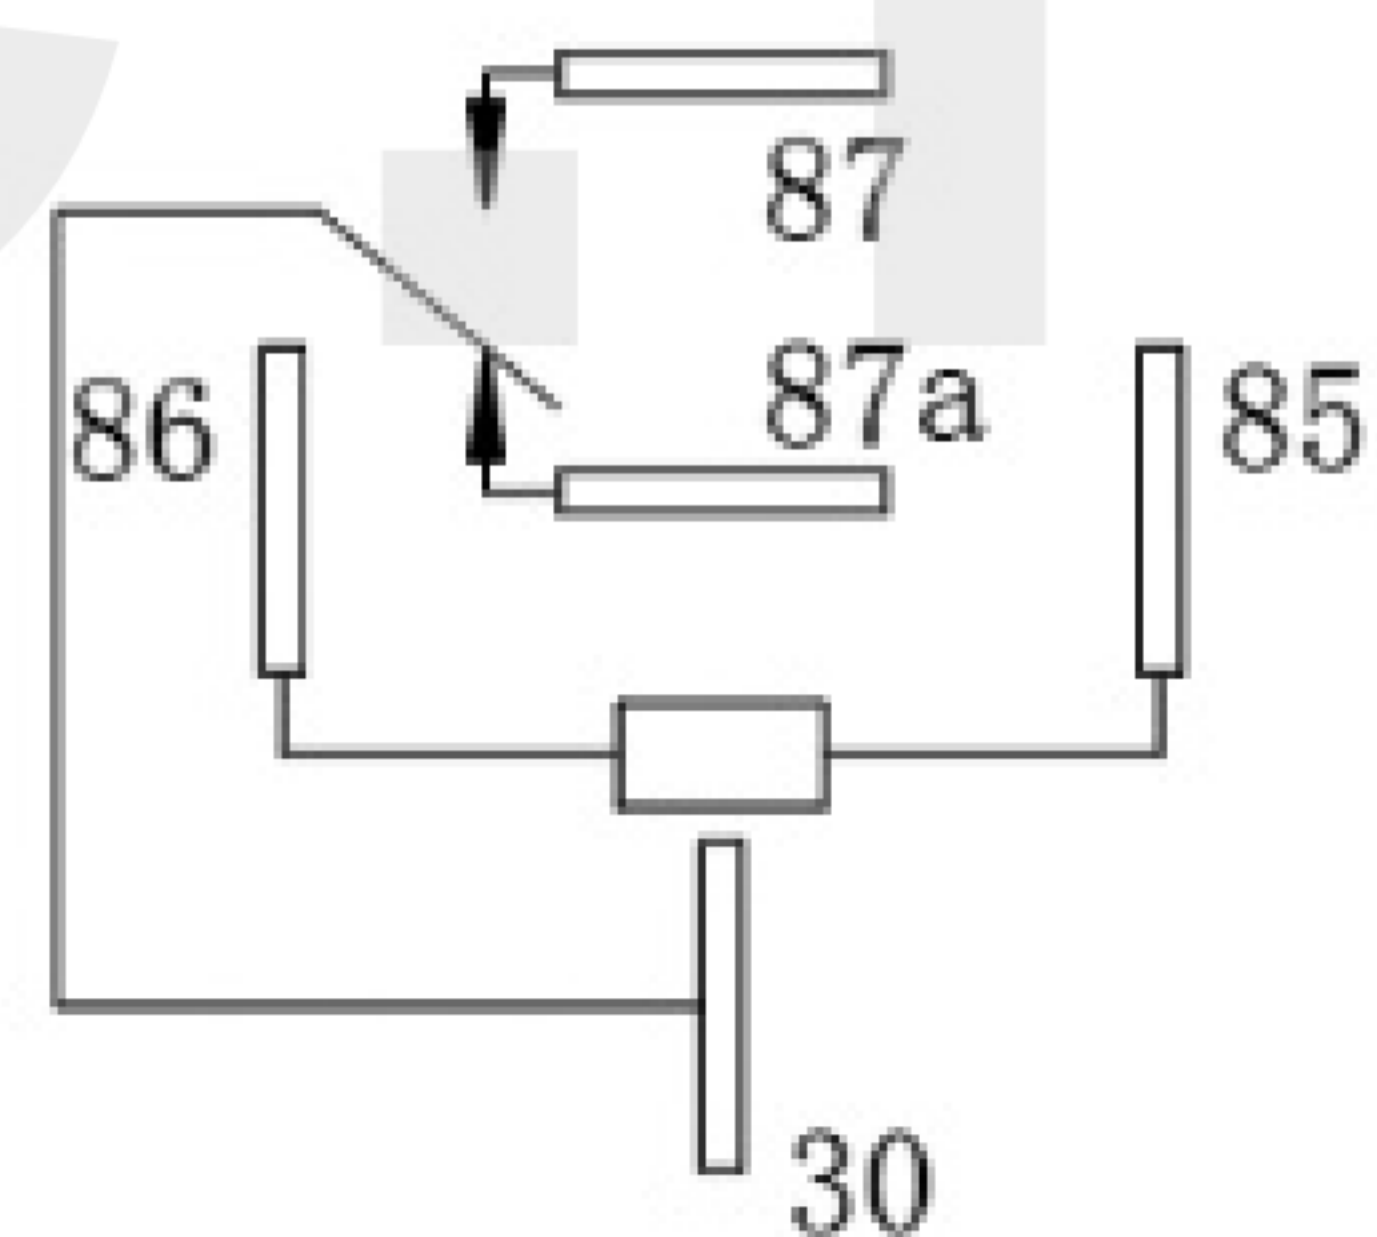

- 1) Permissible accuracy of product execution: dimensions ≤ 1 mm - tolerance ± 0.2 mm, sizes from 1 to 5 mm - tolerance ± 0.3 mm, dimensions > 5 mm - tolerance ± 0.4 mm.
- 2) Tolerance of mounting holes ± 0.1 mm.

**Note:**

The information in this document is for reference only and is subject to change without notice.