# CST-PO8 (PY-08-0)





## Main Feature:

- Socket with PCB terminal.
- No reduction of protection class or creepage/clearance with plastic retainer.
- Easy replacement of relays.
- Socket can be used as connector for diagnosis function.
- Sockets and accessories: RoHS compliance (Directive 2002/95/EC).



Socket with PCB-type terminal Approvals:

c**Я**1°us **Я1**° (€


E306487

#### Accessories: Technical data: Metal Retainer: Rated current Rated voltage / max. Switching voltage AC Dielectric strength coil-contact circuit 150/250 VAC $1,500 V_{rms}$ Insulation resistance (at 500VDC) 100M $\Omega$ Material group of insulation parts ≥Illa Insulation to IEC 60664-1 Type of insulation coil-contact circuit reinforced Open contact circuit functional Rated insulation voltage 250V Pollution degree 230/400V Rated voltage system Over voltage category RoHS Directive 2002/95/EC Sockets, retainers and marking tag: compliant Degree of protection DIN 40050 IP20 Ambient temperature range -25...+55°C Terminals PCB Insertion cycles A (10) Mounting distance 0, dense packing Weight 7g Packaging unit 100pcs.

# Order Information:

① Item: CST
② Contact form: P (for PCB Terminal)
Q (for solder Lug Terminal)
Q (for 08 Terminals Relay)
11 (for 11 Terminals Relay)
14 (for 14 Terminals Relay)

### Dimension:

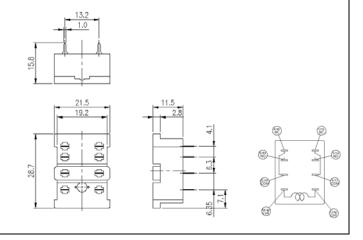

поставщик: **"OOO KOHTAKT"** web: <a href="http://kontakt-t.ru">http://kontakt-t.ru</a> reл./ф.: (8634)369-333 e-mail: <a href="mailto:info@kontakt-t.ru">info@kontakt-t.ru</a>